

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**



Pra titioner's Do ket N . SPEEDY-A

PATENT

#6  
P. Walker  
11/09/03

IN THE UNITED STATES PATENT AND TRADEMARK FFI E

In re application of: Bushell, et al.  
Application No.: 10 / 036,600  
Filed: December 21, 2001  
For: Lockable Nut System

Group No.: 3677  
Examiner: Lugo, Carlos

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which priority is claimed for this case:

Country: Australia

Application  
Number: AU-A-51068/01

Filing Date: June 15, 2001

**WARNING:** "When a document that is required by statute to be certified must be filed, a copy, including a photocopy or facsimile transmission of the certification is not acceptable." 37 C.F.R. § 1.4(f) (emphasis added).

  
SIGNATURE OF PRACTITIONER

Reg. No. 35,730

Louis F. Wagner

(type or print name of practitioner)

Tel. No. (330 ) 258-6453

Buckingham, Doolittle & Burroughs  
50 S. Main Street

P.O. Address

Customer No.: 24115

Akron, OH 44308

**NOTE:** The claim to priority need be in no special form and may be made by the attorney or agent, if the foreign application is referred to in the oath or declaration, as required by § 1.63.

CERTIFICATE OF MAILING (37 C.F.R. § 1.8a)

I hereby certify that this correspondence is, on the date shown below is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to the Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450

Dat : October 13, 2003

  
Signature

Louis F. Wagner


(type or print name of person certifying)

(Transmittal of Certified Copy [5-4])

RECEIVED

OCT 20 2003

GROUP 3600



3677

PTO/SB/21 (01-03)

Approved for use through 04/30/2003. OMB 0651-0031  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>TRANSMITTAL FORM</b>  (to be used for all correspondence after initial filing)	Application Number	10/036,600	
	Filing Date	12/21/2001	
	First Named Inventor	Bushell, et al.	
	Art Unit	3677	
	Examiner Name	Lugo, Carlos	
Total Number of Pages in This Submission	41	Attorney Docket Number	SPEEDY-A

ENCLOSURES (Check all that apply)		
<input type="checkbox"/> Fee Transmittal Form	<input type="checkbox"/> Drawing(s)	<input type="checkbox"/> After Allowance Communication to Group
<input type="checkbox"/> Fee Attached	<input type="checkbox"/> Licensing-related Papers	<input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences
<input type="checkbox"/> Amendment/Reply	<input type="checkbox"/> Petition	<input type="checkbox"/> Appeal Communication to Group (Appeal Notice, Brief, Reply Brief)
<input type="checkbox"/> After Final	<input type="checkbox"/> Petition to Convert to a Provisional Application	<input type="checkbox"/> Proprietary Information
<input type="checkbox"/> Affidavits/declaration(s)	<input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address	<input type="checkbox"/> Status Letter
<input type="checkbox"/> Extension of Time Request	<input type="checkbox"/> Terminal Disclaimer	<input checked="" type="checkbox"/> Other Enclosure(s) (please identify below):
<input type="checkbox"/> Express Abandonment Request	<input type="checkbox"/> Request for Refund	
<input type="checkbox"/> Information Disclosure Statement	<input type="checkbox"/> CD, Number of CD(s) _____	
<input checked="" type="checkbox"/> Certified Copy of Priority Document(s)	Remarks	
<input type="checkbox"/> Response to Missing Parts/Incomplete Application	Transmittal of Certified Copy Return postcard	
<input type="checkbox"/> Response to Missing Parts under 37 CFR 1.52 or 1.53		

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT	
Firm or Individual	Louis F. Wagner
Signature	
Date	October 13, 2003

CERTIFICATE OF TRANSMISSION/MAILING	
I hereby certify that this correspondence is being facsimile transmitted to the USPTO or deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, Washington, DC 20231 on this date: <u>October 13, 2003</u> MAIL STOP Commissioner for Patents, P.O. Box 1450, Alexandria VA 22313-1450	
Typed or printed	Louis F. Wagner
Signature	
Date	October 13, 2003

This collection of information is required by 37 CFR 1.5. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, Washington, DC 20231.

If you need assistance in completing the form, call 1-800-PTO-9199 (1-800-786-9199) and select option 2.

RECEIVED  
OCT 20 2003  
GROUP 3600




**Patent Office  
Canberra**

I, GAYE TURNER, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Complete specification in connection with Application No. 51968/01 for a patent by SPEEDIBOLT PTY LTD filed on 15 June 2001.

WITNESS my hand this  
Second day of January 2002

GAYE TURNER  
TEAM LEADER EXAMINATION  
SUPPORT AND SALES





AU0151968

---

**(12) PATENT ABSTRACT      (11) Document No. AU-A-51968/01**  
**(19) AUSTRALIAN PATENT OFFICE**

---

- (54) Title  
**STRUCTURAL BRACING SYSTEM**
- International Patent Classification(s)  
(51)<sup>7</sup> **E04C 005/18      F16B 039/24      F16B 039/32**
- (21) Application No. : **51968/01**      (22) Application Date : **15/06/01**
- (43) Publication Date : **06/09/01**
- (62) Related to Division(s) : **42532/00**
- (71) Applicant(s)  
**SPEEDIBOLT PTY LTD**
- (72) Inventor(s)  
**PETER BRUCE ARIEL; WALTER LESLIE BUSHELL; RONALD JOSEPH WEBB**
- (74) Attorney or Agent  
**FISHER ADAMS KELLY , GPO Box 1413, BRISBANE QLD 4001**
- (57) Claim

AUSTRALIA

---

*Patents Act 1990*

---

**ORIGINAL  
COMPLETE SPECIFICATION  
STANDARD PATENT**

Invention Title: "STRUCTURAL BRACING SYSTEM"

The following statement is a full description of this invention, including the best method of performing it known to us:

### LOCKABLE NUT SYSTEM

This invention is concerned with locking elements for threaded connection to threaded metal bars.

Particularly, although not exclusively, this invention is  
5 concerned with a locking system for nuts used with threaded bars.

It is common practice to provide bracing support in steel and timber framed structures and foundations to form a triangulated stiffening to resist wind loads and otherwise to restrain structural members comprising the building and/or foundation framework. Threaded steel bars  
10 are also used as "the down" bolts for cyclone rated structures.

Typically, bracing is embodied in wall frames, across rafters and other roofing structures and is connected to load bearing members in the structure. Normally a combination of tension and compression members is used to form a pin jointed framework which takes wind loads  
15 from a wall structure through the bracing framework to the foundations.

Tensionable bracing members are currently selected from:

- (a) continuous threaded steel rod with a variety of attachment means;
- (b) plain steel bar with welded turnbuckles;
- 20 (c) threaded steel bar with right and left hand threads on opposite ends to accommodate turnbuckles;
- (d) threaded steel bar with "D" brackets.

Screw threaded bracing members have the advantage of allowing adjustable attachment of mounting members to accommodate

variances in the positioning of hold down bolts or the like as well as variances in the positioning of supporting members such as columns or the like.

5           The use of screw threaded bracing members facilitates erection as the adjustable mounting permits an increase in length of the bracing member to assist in lifting and positioning the member between connection points on support members. Any sag in the brace member is removed by tensioning the member by adjustable mounts such as turnbuckles having left and right handed threads.

10           The use of adjustable bracing members thereby eliminates the necessity for drift pins and other rigging tools commonly used to accommodate small variances in fixed attachment points associated with angle bracing members.

15           Notwithstanding the relative advantages and disadvantages of adjustable screw threaded bracing members and non-adjustable angle bracing members, angle form bracing members are widely used due to the limited tension capacity of traditional screw threaded rods which is a function of the capacity of the thread on the bar and/or the threaded mounting members.

20           In screw threaded bars where the thread is cut into the outer surface, this leads to a significant reduction in thread capacity.

          In contrast, for threads produced by thread rolling processes, this loss of section is reduced somewhat as the thread is rolled up from a smaller diameter bar.



Regardless of the means by which the thread is formed, tension capacity in the bar is limited to thread capacity. Moreover, the material strength of thread - rolled members is limited to that of a steel grade which can be thread-rolled on conventional thread-rolling equipment unless the product is later subjected to heat treatment which would then render the product uneconomical.

Thread rolled bar is finding increasing structural applications where a tensionable member is required. The relatively coarse pitch thread compared to a machined thread requires the use of an elongate nut to provide adequate contact area between the respective nut and bar threads.

In our co-pending Australian patent application 42532/00 there is described a structural bracing system employing thread rolled steel bar and tensionable end fitting for attachment of the ends of the bar to a structure and a nut locking system for use therewith. While generally satisfactory for its intended purpose, the locking system required a separate securing system to maintain engagement between a threaded nut and the nut locking member. This was inconvenient to manufacture and could not be relied upon in many applications.

One problem that arises with the use of such rods is the ability of nuts engaged with such threads to loosen when subject to vibration or other external forces. The use of a second threaded bar nut as a locknut is not considered suitable as a locking arrangement as it is not possible to obtain adequate thread compression.

Similarly, once a threaded bar is secured by a nut/locknut combination, it is not possible to loosen or tighten the bar without first undoing the locknut.

For example, threaded rods may be used in railway foundations which are subject to the regular hammering of rail vehicle passage. The repeated application of such intermittent pressure may lead to the loosening of a nut engaged with such a rod. If the nut is of particular importance to the structural integrity of, for example, a bridge, or if a significant number of bolts loosen, the potential for catastrophic failure of the system is real and possibly high. Railway engineers often take expensive precautions to avoid such a situation, usually by way of avoiding nut to rod engagement of this sort.

It would be of great benefit if a reliable system of locking a nut to a rod was provided. Further benefits would arise if to do so involved a relatively low cost solution. Clearly, such a system would find wide applicability in areas other than the rail and building industries.

It is an aim of the present invention to overcome or alleviate at least some of the disadvantages associated with prior art locking systems for threaded couplings associated with threaded bars.

20

#### SUMMARY OF THE INVENTION

According to one aspect of the invention there is provided a lockable nut system for threaded steel bar, said lockable nut system comprising:

a screw threaded nut rotatably engageable on said threaded steel bar; and

a locking member slidably engageable on said threaded steel bar, said locking member being adapted in use to resist rotation about said bar, said nut and said locking member being axially engageable whereby in use said locking member resists rotation mat least one direction of said nut on said bar.

The locking member may be adapted to resist rotation by a screw threaded fastener extending between said locking member and a surface of said bar.

Most preferably said locking member includes inner side walls engageable with opposed side walls of said bar.

If required said nut and said locking member are axially engageable by one or more socket and spigot formations on respective adjacent ends of said nut and said locking member.

The lockable nut system may include deformation member for engaging the nut by deforming to engage at least one recess in the nut. The deformation member is preferably resiliently deformable. The deformation means may comprise at least one nut engaging element projecting axially from a locking member and at least one actuating element deformable from a first to a second position, thereby causing the at least one nut engaging element to engage with at least one recess or seat in the nut. Preferably, the at least one nut engaging element is a finger. Preferably, the finger has one or more ramped edges. Most

preferably, the nut engaging element is urged outwards relative to a longitudinal axis of the threaded steel bar during use. The actuating element may be one or more tabs and is preferably a pair of opposed tabs. When in a first position, the one or more tabs may be offset from a transverse plane of the locking member.

The locking means may be adapted to resist rotation around the bar by inclusion of one or more bar engaging members. The bar engaging member may be edges of an aperture of the locking member engageable with parallel sides of the threaded steel bar.

Alternatively, the bar engaging member may comprise at least one bar engaging element projecting axially from the locking member and at least one bar engaging actuating element deformable from a first position to a second position and thereby urging the bar engaging element towards the threaded steel bar. The bar engaging element may be tongue. The bar engaging actuating element may be one or more tabs. The one or more tabs may be offset from the transverse plane of the locking member when in the first position.

The nut for the lockable nut system may include an internal perimeter with a plurality of adjacent recesses for receiving the at least one nut engaging element. Alternatively or additionally, the nut may include an external perimeter with a plurality of adjacent recesses for receiving the nut engaging element.

In a further aspect, the invention resides in a locking member for a lockable nut system comprising a substantially planar body

with at least one axially projecting finger and at least one finger actuating tab, wherein, in use, deformation of the at least one finger actuating tab from a first to a second position urges an end of the at least one finger in a preselected direction. The preselected direction may be outward.

5 Preferably, the locking member further comprises at least one bar engaging tongue and at least one tongue actuating tab, wherein, in use, deformation of the at least one tongue activating tab from a first position offset from a transverse plane of the body to a second position substantially co-planar with the transverse plane of the body urges an end  
10 of the bar engaging tongue inwardly.

In yet a further aspect, the invention may reside in a nut for a lockable nut system, said nut including a plurality of recesses for receiving a portion of a locking nut. Preferably, the recesses are distributed around an internal perimeter of a bore of the nut. Alternatively,  
15 the plurality of recesses may be distributed around an outer perimeter of the nut.

In order that the invention may be more fully understood and put into practical effect, reference will now be made to preferred embodiments of the invention illustrated in the accompanying drawings in  
20 which:

FIG. 1 shows a preferred form of threaded steel bar for use with the invention.

FIG. 2 shows a lockable nut system according to the invention.

FIG. 3 shows side and end views of the nut of FIG. 2.

FIG. 4 shows side and end views of the sleeve of FIG. 2.

FIG. 5 is a perspective view of a locking washer for use with a lockable nut system.

5 FIG. 6 is a top view of the washer of FIG. 5.

FIG. 7 is a side view of the washer of FIG. 5.

FIG. 8 is a side view of the washer of FIG. 5 orthogonal to the view of FIG. 7.

FIG. 9 is the view of FIG. 7 with indications of operative forces during use.

FIG. 10 is the washer of FIG. 9 when in locking position.

FIG. 11 is an orthogonal view of the washer of FIG. 9 with indications of operative forces during use.

FIG. 12 is the same view as FIG. 11 when the locking washer is in locking position.

FIG. 13 is a perspective view of a lockable nut system using the washer of FIG. 5.

FIG. 14 is a side view of the lockable nut system of FIG. 13 aligned for application.

20 FIG. 15 is a plan view of the lockable nut system of FIG. 14.

FIG. 16 is a part sectional side view of the lockable nut system of FIG. 14 when engaged taken in direction of arrows AA.

FIG. 17 is a part sectional view of the lockable nut system of FIG. 16 taken in the direction of arrows BB.

FIG. 18 is a perspective view of a nut for use in the lockable nut system according to the present invention.

FIG. 19 is a reversed perspective view of the nut of FIG. 18.

FIG. 20 is a top sectional series view of a preferred  
5 embodiment of the lockable nut system in operation.

FIG. 21 is a perspective view of a further washer for use with a lockable nut system of the invention.

While standard threaded bar may be employed with the invention, the rounded cross-sectional profile of the threads does not  
10 provide optimum tension capacity.

For this reason, it is preferred to utilise with the invention a more substantially profiled thread similar to an "Acme" style thread.

FIG. 1 illustrates portion of a threaded bar 40 having a planar face 41 extending longitudinally of the bar on diametrically  
15 opposed sides thereof.

The thread comprises part helical ribs 42 extending over the diametrically opposed part circular portions 43 of bar 40, the ribs having a generally trapezoidal cross section as illustrated at the end 44 of each part helical rib 42.

20 Threaded bar of the type illustrated in FIG. 1 is employed widely in the mining industry for chemically anchored rock bolts and, as shown, comprises a single start thread.

FIGS. 2-4 show one embodiment of a nut locking system which may be employed with the invention.

In the drawings nut 50 is a conventional long bodied nut utilised with bar 51 having a thread 52 extending generally in axially opposite directions and a pair of generally planar side walls 53 therebetween. A pair of slots 54 is formed in, one or both end walls 55 of nut 50.

A locking member 56 has a cross sectional aperture with a shape complementary to the cross sectional shape of bar 51 such that the locking member is slidable therealong but is prevented from rotation by engagement of planar side walls 57 of the sleeve with the side walls 53 of the bar. The locking member 56 includes a pair of spigot like projections 58 axially engageable with slots 54 thereby effectively locking nut 50 against rotation on the bar 51.

In many applications such as diagonal or upright bracing, earth anchors or the like, the locking member 56 may be maintained in engagement with nut 50 under the influence of gravity. Where it is not possible to rely on gravitational forces to maintain engagement, a screw threaded fastener 59 or the like may be utilised to prevent disengagement between the nut 50 and locking member 56.

FIG. 5 shows a locking member in the form of locking washer 60 which includes tongue actuating tabs 61 which are shown here in a first position which is offset from a transverse plane of the locking washer 60. Movement of the tongue actuating tab 61 to a second position which is substantially co-planar with the transverse plane of the locking washer 60 causes tongues 62 to be displaced radially inwards.



The locking washer 60 also comprises finger actuating tabs 63 which are also shown in a first position offset from the transverse plane of the locking washer 60 but, in this case, offset in a direction opposite to that of the tongue actuating tabs 61. The finger actuating tabs 63 may be moved to a second position which is substantially co-planar with the transverse plane of the locking washer 60 which results in a distal end of the fingers 65 being displaced radially outwards. The fingers are an example of nut engaging elements. The finger actuating tabs are an example of actuating elements. The locking washer 60 also includes a central aperture 66 for receiving a threaded steel bar.

FIG. 6 shows a top view of the locking washer 60 of FIG. 5 which highlights the aperture 66 with tongue 62 and fingers 65 disposed around its periphery.

FIG. 7 is a side view of the locking washer of FIG. 6 taken in the direction of arrow 67 and showing tongue actuating tab 61 offset from the transverse plane 68. Tongues 62 project and are apparent above the body 69 of the locking washer 60. Likewise, fingers 65 are also readily apparent.

FIG. 8 is a side view of the locking washer 60 of FIG. 6 taken in the direction of arrow 70. This view shows the finger actuating tab 63 offset from transverse plane 68 in a direction opposite to that of the tongue actuating tab 61. A single tongue actuating tab 61 and two finger actuating tabs 63 are visible as are tongue 62 and fingers 65.

FIGS. 9 and 10 show the forces applied to the locking

washer 60 during use and in one direction.

In use, the locking washer 60 is compressed between a first surface and a nut which threadably engages the threaded bar which is located through aperture 66. As the nut is tightened, the locking washer is  
5 compressed between two surfaces. Force is applied in the direction of arrows 71 to finger actuating tabs 63 while simultaneously an opposite force in the direction of arrow 72 is applied to tongue actuating tab 61. The locking washer is comprised of material which permits movement of the tabs 61, 63 from the first position shown to the second position shown  
10 in FIG. 10 in which all the tabs are substantially co-planar with the body 69 and transverse plane 68 of the locking washer 60.

When the tabs 61 move to the second position shown in FIG. 10, the distal ends 73 of the tongues 62 are displaced radially inwardly. At the same time as the finger activating tabs 63 are also  
15 displaced to the second position shown in FIG. 10, the distal ends 74 of the fingers 65 are displaced radially outwardly.

The degree of displacement of the distal ends 73 of the tongue 62 is seen by a comparison of the length of the dimension arrows 75 in FIGS. 9 and 10, respectively.

20 The operation of the locking washer is seen in side view at a right angle or orthogonal view to that of FIGS. 9 and 10 in FIGS. 11 and 12, respectively. As the finger actuating tabs 63 are moved from the first position seen in FIG. 11 to the second position in FIG. 12 which is substantially co-planar with the transverse plane 68 of the locking washer

60, the distal ends 74 of the fingers 65 are displaced radially outwardly. The degree of displacement is seen by comparison of the dimension arrows 76 of FIGS. 11 and 12, respectively.

FIG. 13 is a perspective view of the locking washer 60  
5 located on a threaded bar 80 and intermediate a castellated nut 77 and an immobile surface 78. The castellated nut 77 is screw threadedly engaged with a thread comprising part helical ribs 79. In use as the castellated nut 77 is advanced towards the surface 78, locking washer 60 is compressed between the nut 77 and surface 78. The locking washer is  
10 preferably sited so that one of the tongues 62 is aligned with flat 81 and the other tongue 62 is aligned with the opposed flat (not visible). In the present view, the locking washer 60 requires rotation to achieve this alignment. As the locking washer 60 is compressed, tongue activating tabs 61 are flattened leading to displacement of the distal ends of the  
15 tongues 62 towards the flats 81 and subsequent contact between those structures. The engagement of the tongues 62 with the flats 81 immobilises the washer 60 relative to the rod 80.

Simultaneously with compression of the locking washer 60, the finger actuating tabs 63 are also compressed towards a transverse  
20 plane of the locking washer 60 which causes distal ends of the fingers 65 to be displaced radially outwardly. At least one of the fingers 65 will seat in one of the slots of the nut 77 as exemplified by slot 82. The presence of a finger 65 in the slot 82 will prevent rotation of the nut 77 relative to bar 80 and thereby lock the nut resisting or preventing its subsequent

loosening. As used herein the references to "prevention of loosening" or the like are not intended to be construed as absolute, rather that in normal use environments, the nut locking system will prevent loosening of the nut under the influence of forces which might otherwise be expected to increase a risk of loosening of the nut in use. It readily will be apparent to a person skilled in the art that with sufficient force applied by a spanner or the like, a nut may be loosened against the locking resistance of the locking member, possibly causing damage to the components of the lockable nut system and/or the thread on the bar. It is clear that if adequate rotational force is applied to the nut, the integrity of the washer may be destroyed.

Preferably, the washer is made of a material such as a spring steel with some degree of resilience which will allow the fingers to flex against an inner surface of the nut as it is tightened and subsequently spring into the slot 82. The fingers may be angled to the direction of rotation of the inner surface of the nut 77 to thereby provide a camming effect in at least one direction to allow easy tightening of the nut with a ramped radial inward displacement of the fingers. This camming or ramping effect may be in one direction alone or, preferably, may be in two directions so that the nut may be removed without damage to the locking washer allowing re-use of the locking washer.

FIG. 14 is a side view of the arrangement of FIG. 13 in which a series of slots 82 is apparent in nut 77. The direction of rotation and tightening is shown by arrow 83 and a plan view of the components is

visible in FIG. 15.

FIG. 16 shows a part sectional view of the arrangement of FIG. 15 taken along the line AA when the components of the locking system are fully engaged. The locking washer 60 is substantially flattened with the tabs 61, 63 forced into a transverse plane of the locking of the body of the washer 60.

FIG. 17 is a part sectional view of the arrangement of FIG. 16 taken through the line BB showing slots 82 formed by adjacent legs 84 of the castellated nut. The tongues 62 are shown forced into engagement with bar 80. Fingers 65A, 65B are shown located in slots 82 and thereby blocking rotation of the legs 84 of the nut and therefore the nut itself.

FIGS. 18 and 19 show views of opposite ends of a preferred embodiment of a nut 85 having an internal thread 86 formed to engage the thread on a bar. A first end 87 of the nut 85 includes a recessed region 88 with a continuously toothed perimeter 89 formed internally in the nut. The recesses between adjacent teeth of the outer perimeter 89 provide seats to receive one or more locking teeth of a locking washer. In an alternative form, the toothed perimeter may be on the outside of the nut. In such a case, however, movement of the finger activating tab would need to cause ends of the fingers to be displaced radially inwards, not outwards, so that they engage the seats.

FIG. 20 shows a series of views demonstrating the function of the nut 85 of FIG. 19 when used with five spaced teeth 90 of a locking washer 91. Adjacent recesses 92 on the nut 85 are separated by  $22.5^\circ$ .

In the first drawing of FIG. 20, a tooth 90A is seated in a recess 92A. The second drawing of FIG. 20 shows the nut 85 rotated  $7.5^\circ$  with tooth 90B now located in recess 92B. The process continues throughout the rest of the figures as the nut 85 is rotated through  $37.5^\circ$  thereby providing each of the five teeth with a period during which they are located in a locking recess. The rod 80 is shown grasped by tongues 93. The teeth 90 are shown with ramped anterior and posterior edges 94 which allows the nut to be advanced or backed off without damaging the teeth. The teeth are displaced by a camming effect of the ramped edges so as to clear the recesses or seats. The arrangement shown provides a user with a wide variety of tightening options in use as a tooth engages a recess for every  $7.5^\circ$  of turn. This feature is very important to coarse pitched threads which can require a massive increase in not tightening torque over a relatively small degree of rotation of the nut.

Referring to FIG. 21, there is shown an embodiment of a locking washer 160, wherein the tongue activating tab 161 and the finger activating tabs 163 are offset from a transverse plane of the washer 160 in the same direction. In order for the tongue 162 and fingers 165 to be displaced during use in an inward and outward direction, respectively, it is necessary that they be disposed in opposite axial directions. That is, the tongues 162 project in a first direction away from a transverse plane of the washer 160 and the fingers 165 project in the opposite direction relative to the transverse plane. In this embodiment, the tongue activating tabs 161 and finger activating tabs 163 are still shown as separate items.

However, the washer may be dished or otherwise fabricated as a low truncated cone with a continuous apron forming the tabs whereby under compressing from a nut, the washer flattens to actuate both the tabs and fingers to engage the bar and nut respectively.

5                   In a modification of the locking member of FIG 21, the washer 160 may be dished or otherwise formed as a low frustoconical member with the convex surface extending in the same direction as teeth 165. In this embodiment tongues 162 may be dispensed with but otherwise provide shouldered abutment 166 generally coplanar with the  
10 washer in use to engage the parallel sides of the threaded bar. Tongues 162 may be formed in the same direction as fingers 165.

When this latter embodiment is compressed by a nut against an anchoring surface associated with the threaded bar coupling, the tongues 162, if present, or the shouldered abutments 166 rotate  
15 radially inwardly to engage spaced recesses formed in the outer surface of a tubular extension (not shown) formed on the end of the nut.

The embodiment shown in FIG 21 is however, the currently most preferred locking member for a locking nut system according to the invention as it is the simplest to manufacture and by turning tongues 162  
20 away from the nut to be locked, the depth of the finger engaging recess in the end of the nut is reduced thereby maximizing the area of engagement between the nut and bar threads.

In each of the embodiments of FIGS 5 to 21, the ratio of the number of fingers on the locking member or washer to the number of

finger engaging recesses associated with the nut is selected according to the pitch of the thread used in the nut/bar combination to accommodate large tongue variations with coarse pitched threads in particular.

In a further embodiment, the locking member for the lockable nut system may comprise a planar disc-like body having a central aperture complementary to the cross sectional shape of a bar of the type generally shown in FIG. 1 whereby relative rotation between the bar and body is prevented by engagement of the matching shapes. The disc may have one or more axially extending tabs which can be bent down with a hammer to engage in the slots 54 of nut 50.

In a still further modification of the sleeve-like locking member 56 of FIGS. 2-4 or the disc-like body described above, they may include spigots or tabs with enlarged ends engageable in a slot or slots in a nut 50, the slot or slots having complementary shapes to the enlarged end spigots or tabs, which when urged into the slots by a hammer or the like, secure the nut and locking member against axial separation.

In its simplest form, the locking washer may comprise an oval central aperture formed to prevent or resist rotation of the washer around a bar and one or more teeth to engage locking nut. The teeth may be activated by a tab or any suitable formation such as a conically shaped body which flattens under compression and displaces the teeth radially outwardly.

Throughout this specification and claims which follow, unless the context requires otherwise, the word "comprise", and variations



such as "comprises" or "comprising", will be understood to imply the inclusion of a stated integer or group of integers or steps but not the exclusion of any other integer or group of integers.

5        It will be readily apparent to a skilled addressee that many modifications and variations may be made to the invention without departing from the spirit and scope thereof.

Claims

1. A lockable nut system for threaded steel bar, said lockable nut system comprising:
  - a screw threaded nut rotatably engageable on said threaded steel bar; and
  - a locking member slidably engageable on said threaded steel bar, said locking member being adapted in use to resist rotation about said bar, said nut and said locking member being axially engageable whereby in use said locking member resists rotation in at least one direction of said nut on said bar.
2. A lockable nut system as claimed in claim 1 wherein said locking member has a non-circular cross-section aperture generally complementary to a non-circular cross-sectional shape of said bar.
3. A lockable nut system as claimed in claim 1 or claim 2 wherein the locking member has a screw threaded fastener extendable between said locking member and a surface of said bar.
4. A lockable nut system in any one of claims 1 to 3 wherein said locking member includes inner side walls engageable with side walls of said bar.
5. A lockable nut system as claimed in any one of claims 1 to 4 wherein said nut and said locking member are axially engageable by one or more socket and spigot formations on respective adjacent ends of said nut and said locking member.
6. A lockable nut system as claimed in any one of claims 1 to 5

wherein said locking member is a tubular member.

7. A lockable nut system as claimed in any one of claims 1 to 5 wherein said locking member has a generally planar body.

8. A lockable nut system as claimed in any one of claims 5 to 7  
5 wherein said socket and spigot formations respectively comprise an enlarged end element and a necked aperture, said socket and spigot formations, when engaged, preventing axial separation of said nut and said locking member.

9. A lockable nut system as claimed in claim 1, wherein the  
10 locking member includes deformation means for axially engaging the nut by deforming to engage at least one recess in the nut .

10. A lockable nut system as claimed in claim 9, wherein the deformation means is resiliently deformable.

11. A lockable nut system as claimed in either of claim 9 or  
15 claim 10, wherein the deformation means comprises:

at least one nut engaging element projecting axially from the locking member; and

at least one actuating element deformable from a first to a second position, thereby urging the at least one nut engaging element into  
20 engagement with the at least one recess in the nut.

12. The lockable nut system of claim 11, wherein the at least one nut engaging element is a finger.

13. The lockable nut system of claim 12, wherein the finger has one or more ramped edges.

14. The lockable nut system of any one of claims 11 to 13, wherein the nut engaging element engages the at least one recess when urged outwards relative to a longitudinal axis of the threaded steel bar.

15. The lockable nut system of any one of claims 11 to 14,  
5 wherein the at least one actuating element is one or more tabs.

16. The lockable nut system of claim 15, wherein the at least one actuating element is a pair of opposed tabs.

17. The lockable nut system of any preceding claim wherein the locking member includes bar engaging means in use adapted to resist  
10 relative rotation between the locking member and said bar.

18. The lockable nut system of claim 17, wherein the bar engaging means comprises edges of an aperture of the locking member engageable with parallel side walls of the threaded steel bar.

19. The lockable nut system of claim 17, wherein the bar  
15 engaging means comprises:

at least one bar engaging element projecting axially from the locking member; and

at least one bar engaging actuating element deformable from a first position to a second position thereby urging the rod engaging  
20 element towards the threaded steel rod.

20. The lockable nut system of claim 19, wherein the at least one bar engaging element is a tongue.

21. The lockable nut system of either of claims 19 or 20, wherein the at least one bar engaging actuating element is one or more

tabs offset from a transverse plane of the locking member.

22. A lockable nut system of any one of claims 11 to 21, wherein the nut includes an internal perimeter with a plurality of recesses for receiving the at least one nut engaging element.

5 23. A lockable nut system of any one of claims of 11 to 21, wherein the nut includes an external perimeter with a plurality of recesses for receiving the at least one nut engaging element.

24. A locking member for a lockable nut system, said locking member comprising a substantially planar body, body comprising at least one axially projecting finger and at least one finger actuating tab wherein  
10 in use, deformation of the at least one finger actuating tab from a first position offset from a transverse plane of the body to a second position substantially co-planar with the transverse plane of the body urges an end of said at least one axially projecting finger outwardly to engage an  
15 adjacent inner end of a nut to resist rotation thereof.

25. A locking member for a lockable nut system, said locking member comprising a substantially planar body, said body comprising at least one axially projecting finger, at least one finger actuating tab wherein in use deformation of the at least one finger actuating tab from a  
20 first position offset from a transverse plane of the body to a second position substantially co-planar with the transverse plane of the disc urges an end of said at least one axially projecting finger inwardly to engage an adjacent outer end of a nut to resist rotation thereof.

26. The locking member for a lockable nut system of either

claim 24 or claim 25 further comprising at least one bar engaging tongue and at least one tongue actuating tab wherein deformation of the of the at least one tongue actuating tab from a first position offset from a transverse plane of the body to a second position substantially co-planar with the transverse plane of the body urges an end of the bar engaging tongue inwardly.

27. A nut for a lockable nut system of any one of claims 11 to 24, said nut including a plurality of recesses for receiving a portion of a locking member, said recesses being distributed around an internal perimeter of a bore of the nut.

28. A nut for a lockable nut system of any one of claims 11 to 23 and 25, said nut including a plurality of recesses for receiving a portion of a locking member, said recesses being distributed around an outer perimeter of the nut.

29. A lockable nut system as claimed in any one of claims 24 to 26 wherein said substantially planar body is dished.

30. A lockable nut system substantially as hereinbefore described with reference to FIGS. 2 to 4.

31. A locking member for lockable nut system substantially as herein described with reference to FIGS. 5 to 12.

32. A lockable nut system substantially as herein described with reference to FIGS. 13 to 17.

33. A nut for a lockable nut system substantially as herein described with reference to FIGS. 18 and 19.

34. A locking member for a lockable nut system substantially as,  
herein described with reference to FIG. 21.

DATED this Fifteenth day of June 2001.

SPEEDIBOLT PTY LTD

5

By their Patent Attorneys

FISHER ADAMS KELLY

Abstract

A lockable nut system for use with threaded steel bar which includes a screw threaded nut for engagement with the threaded steel bar and a locking member which is slidably engageable with the bar. The locking member is adapted to resist rotation about the bar and is also axially engageable with the nut to prevent rotation of the nut. The locking member may have a finger to engage the nut with an end of the finger being displaced to engage the nut as a result of deformation of an finger actuating tab. The locking member may engage the bar by displacement of an end of at least one tongue as a result of deformation of a tongue actuating tab during compression between the nut and a second structure.



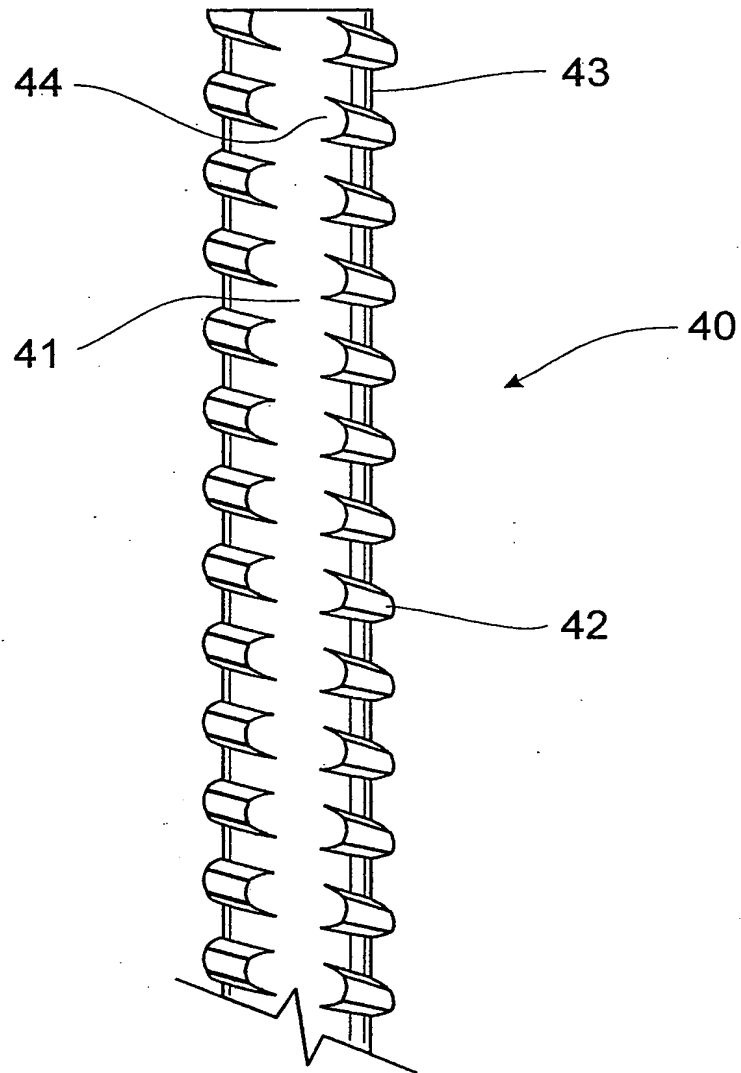


FIG. 1

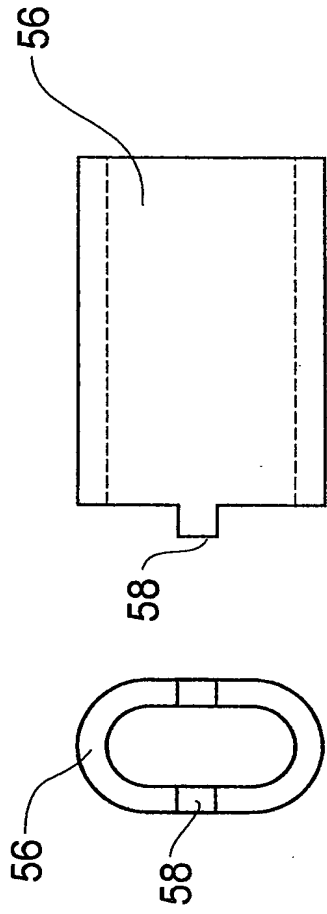


FIG. 4

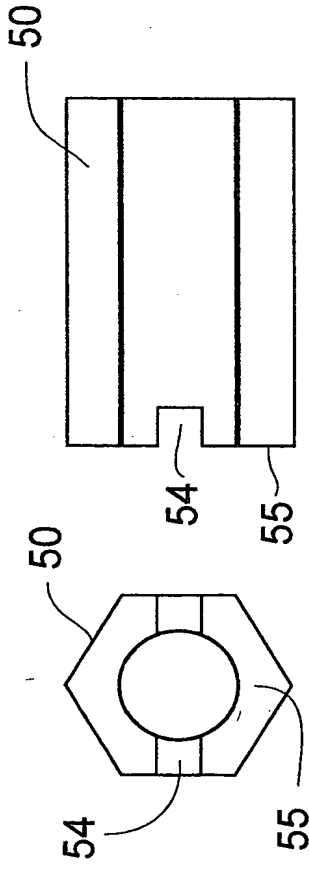


FIG. 3

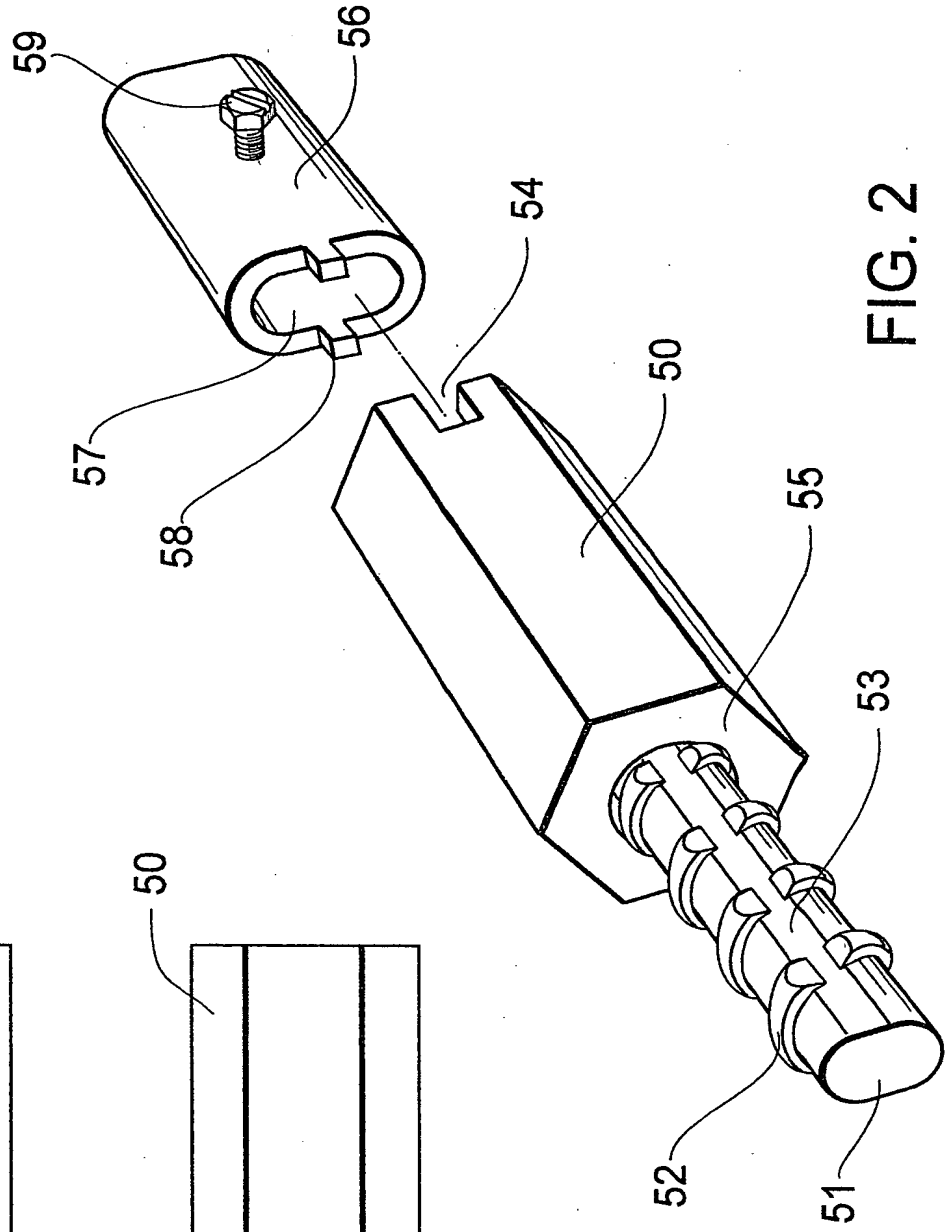


FIG. 2

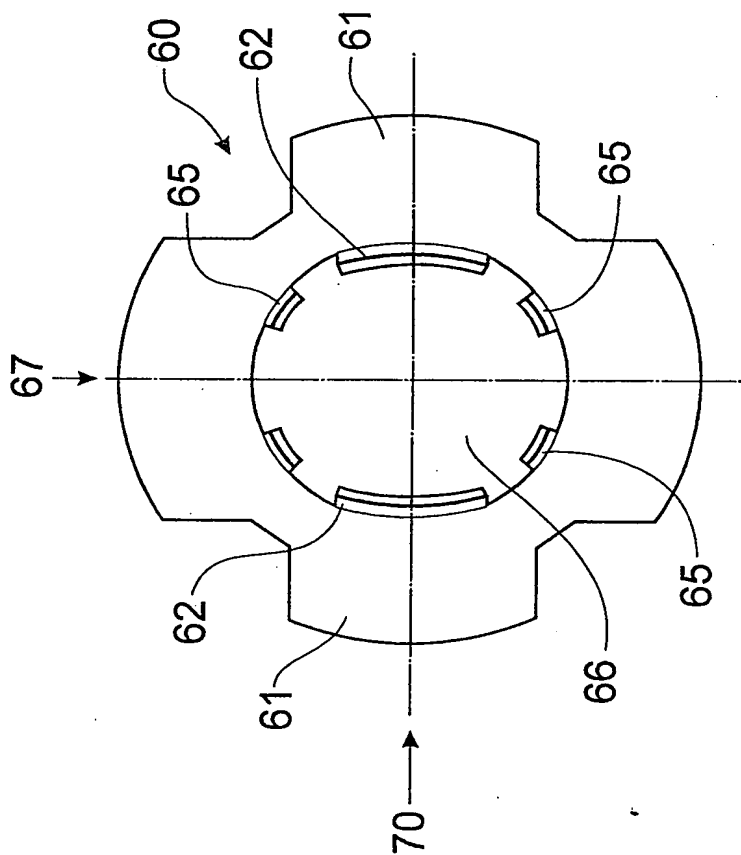


FIG. 6

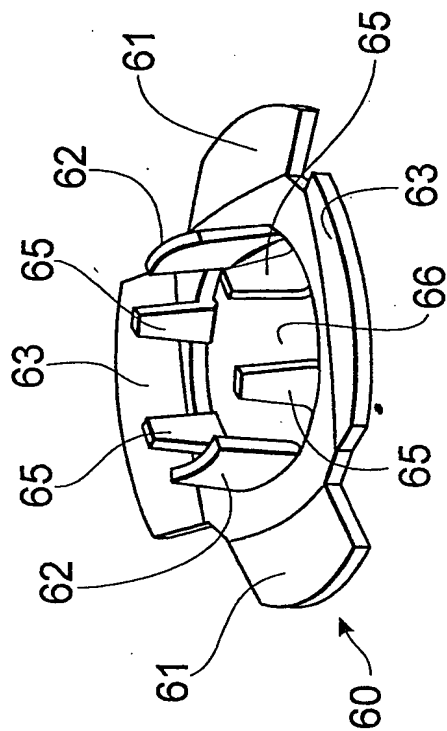


FIG. 5

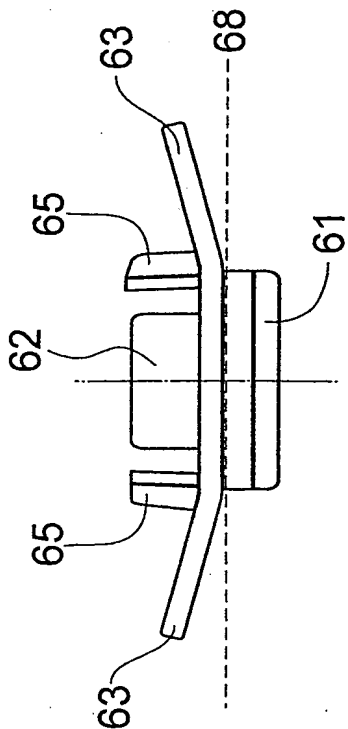


FIG. 8

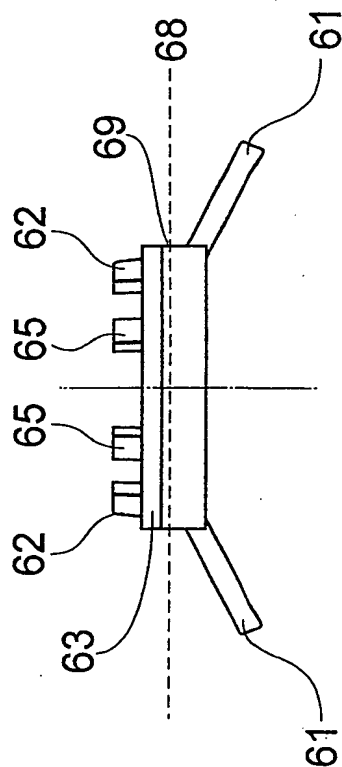


FIG. 7

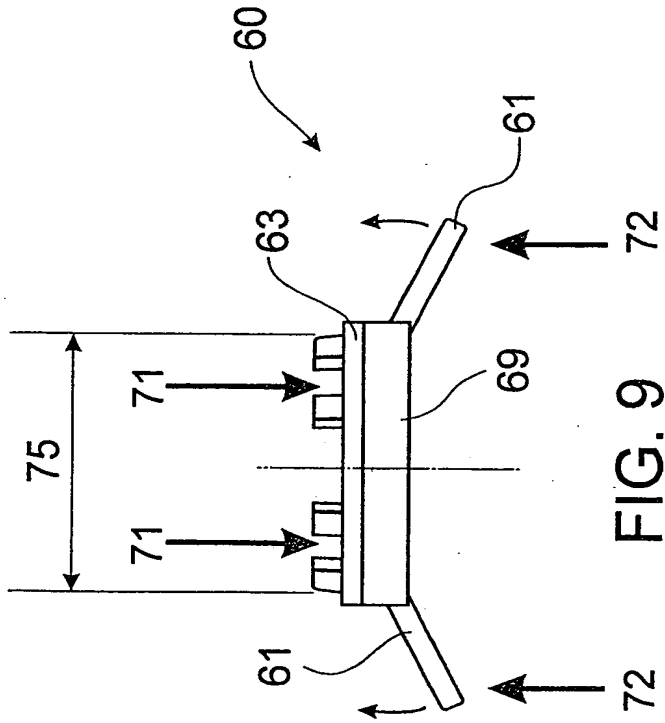


FIG. 9

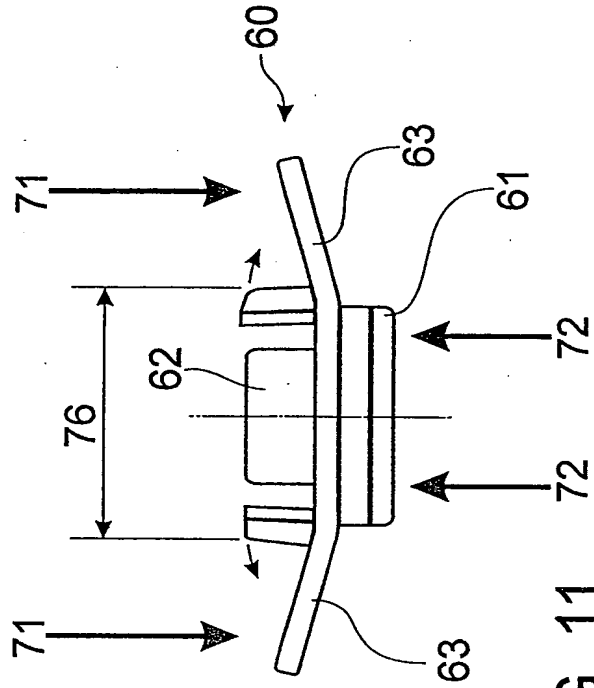


FIG. 11

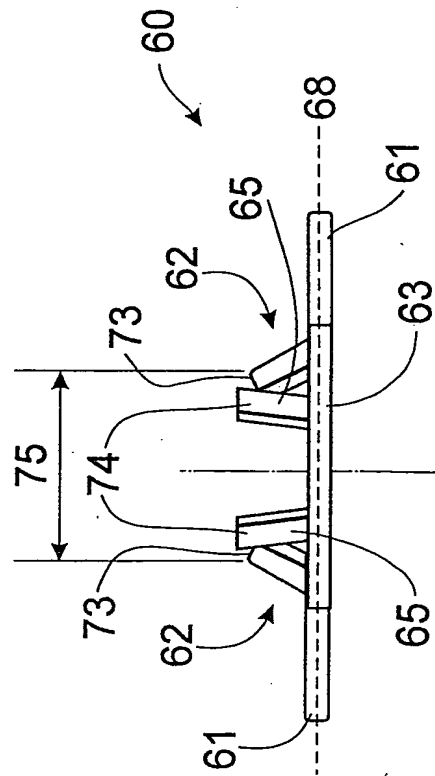


FIG. 10

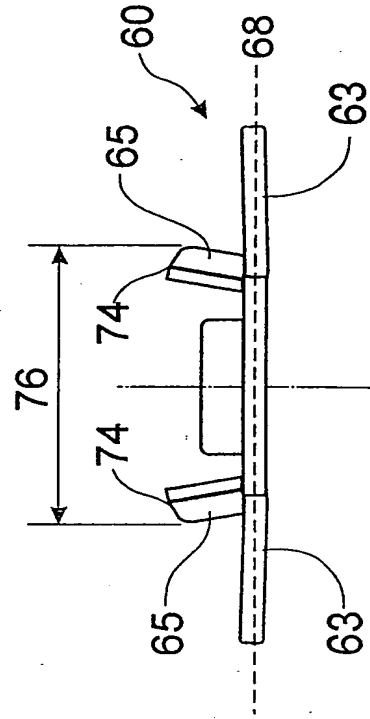


FIG. 12

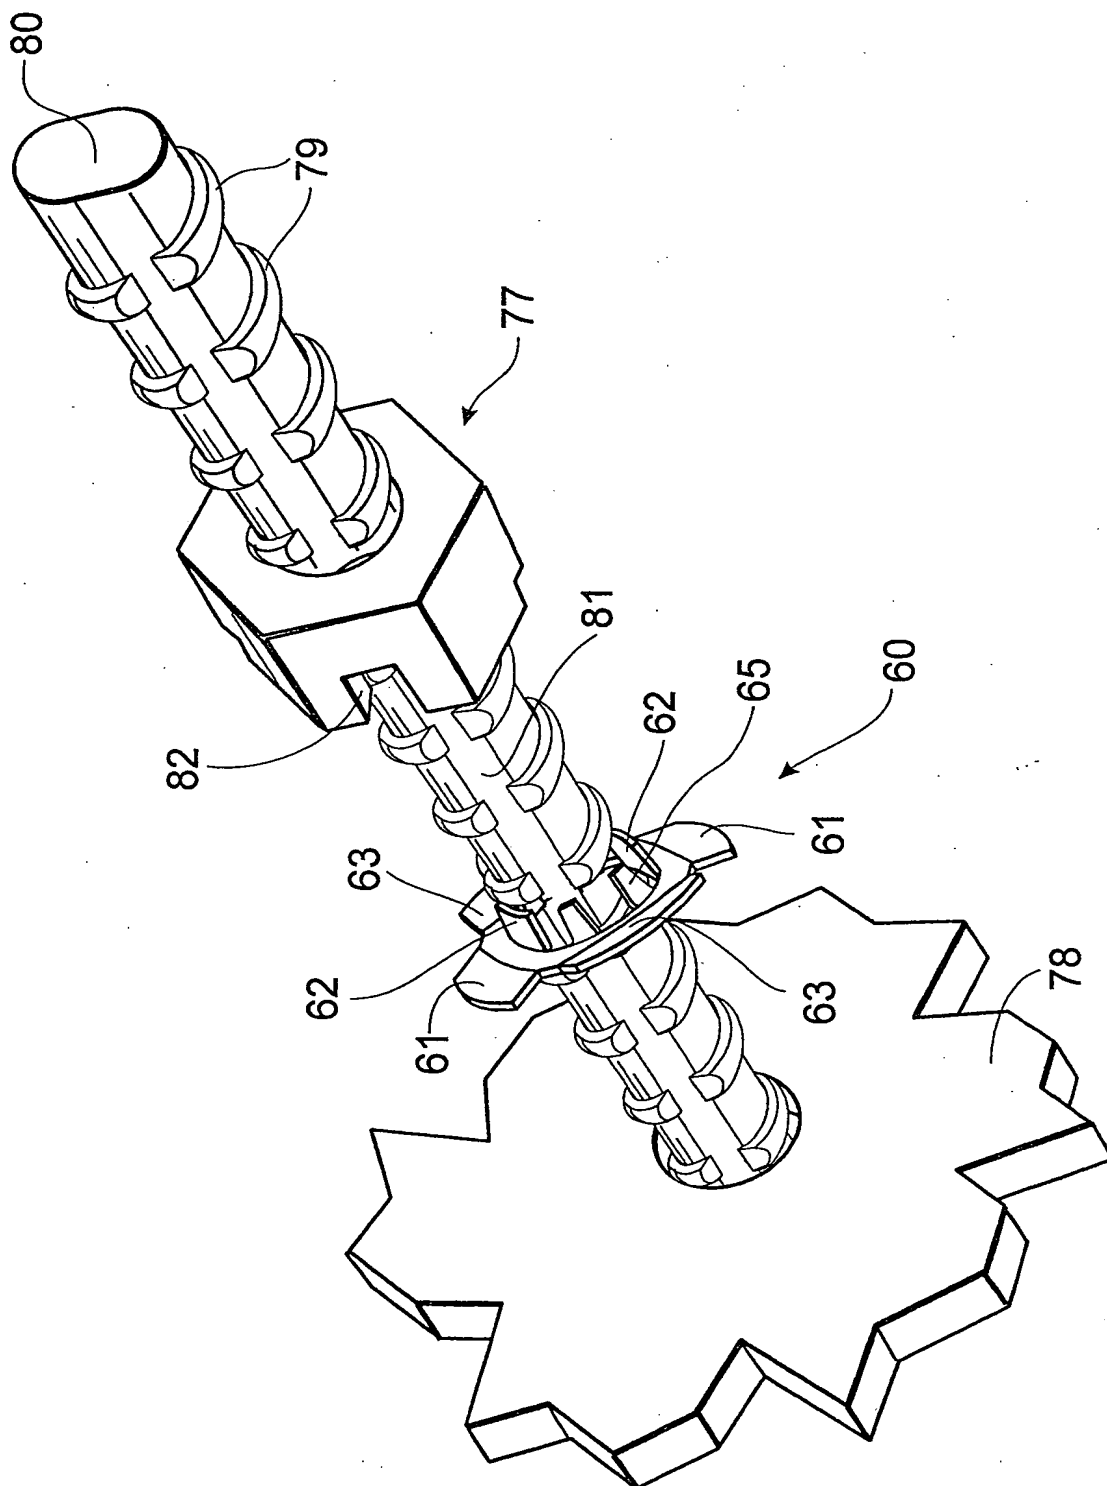


FIG. 13

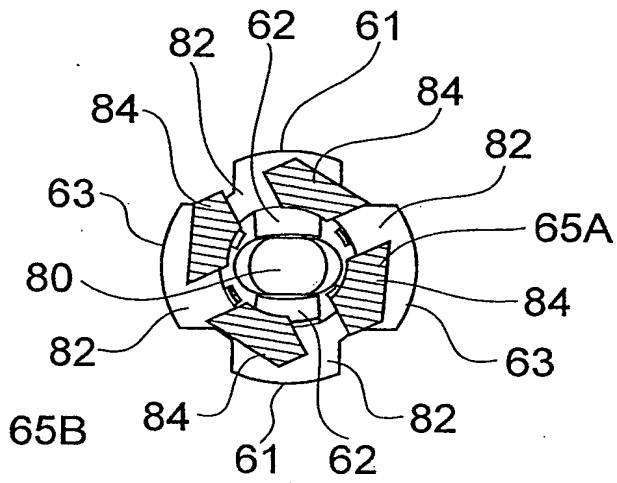


FIG. 17

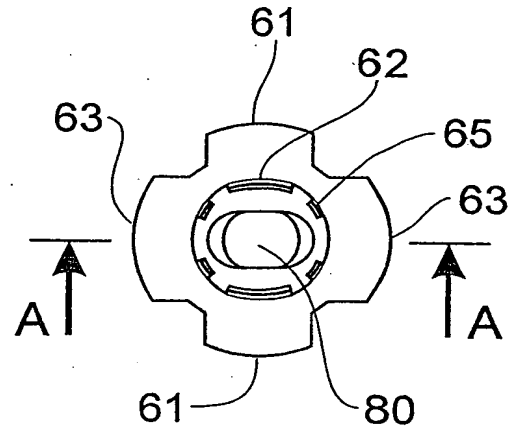


FIG. 15

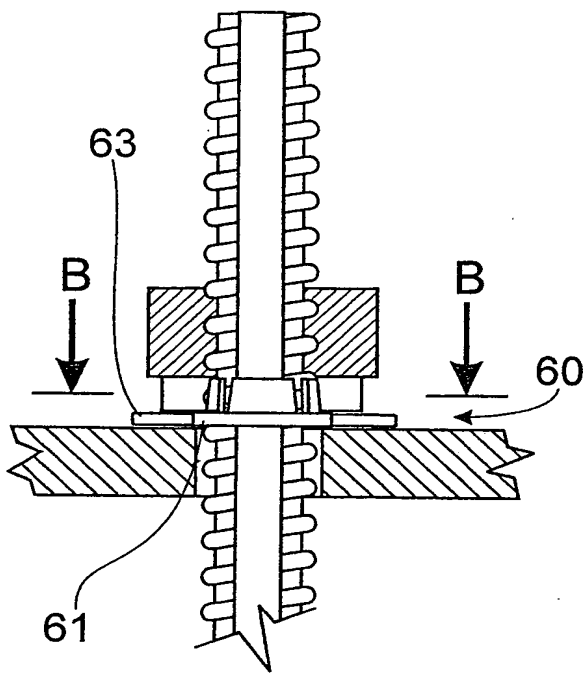


FIG. 16

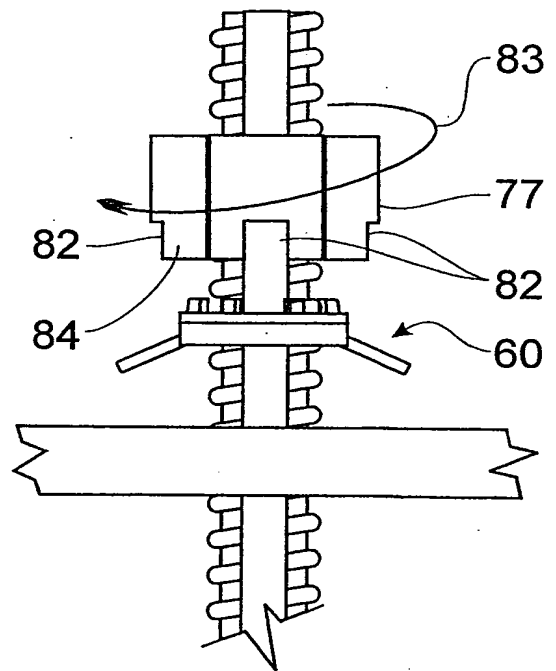


FIG. 14

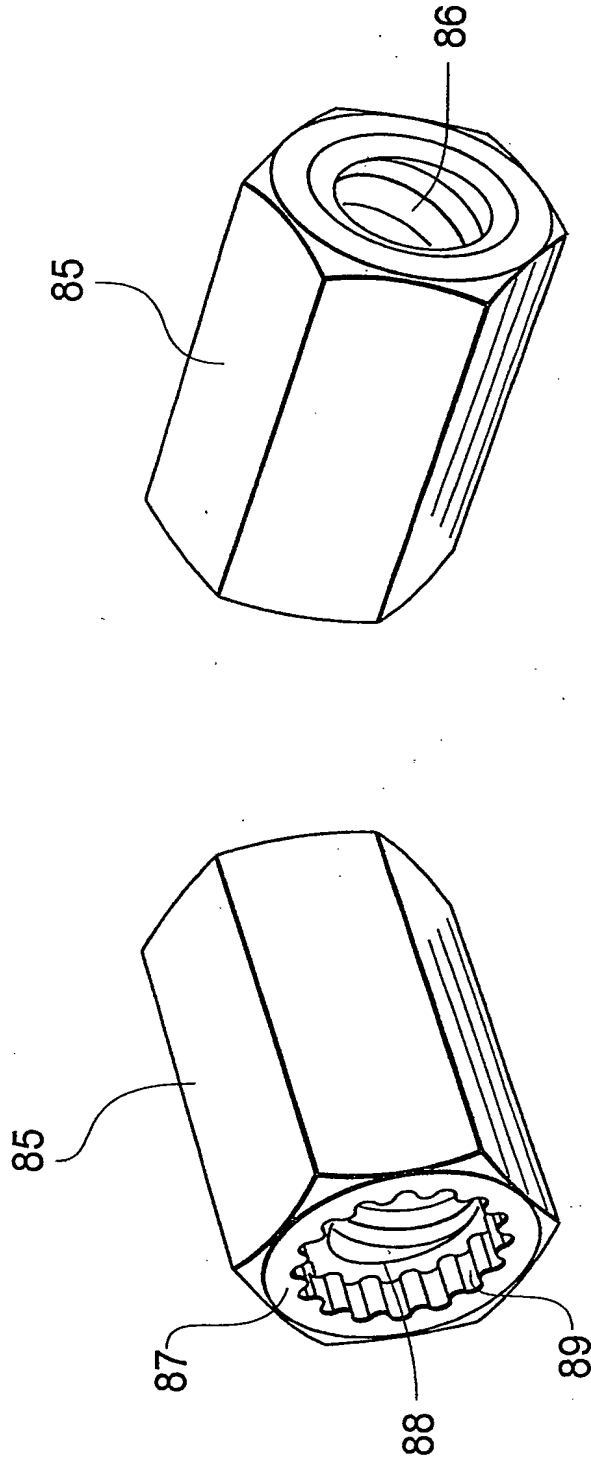


FIG. 19

FIG. 18

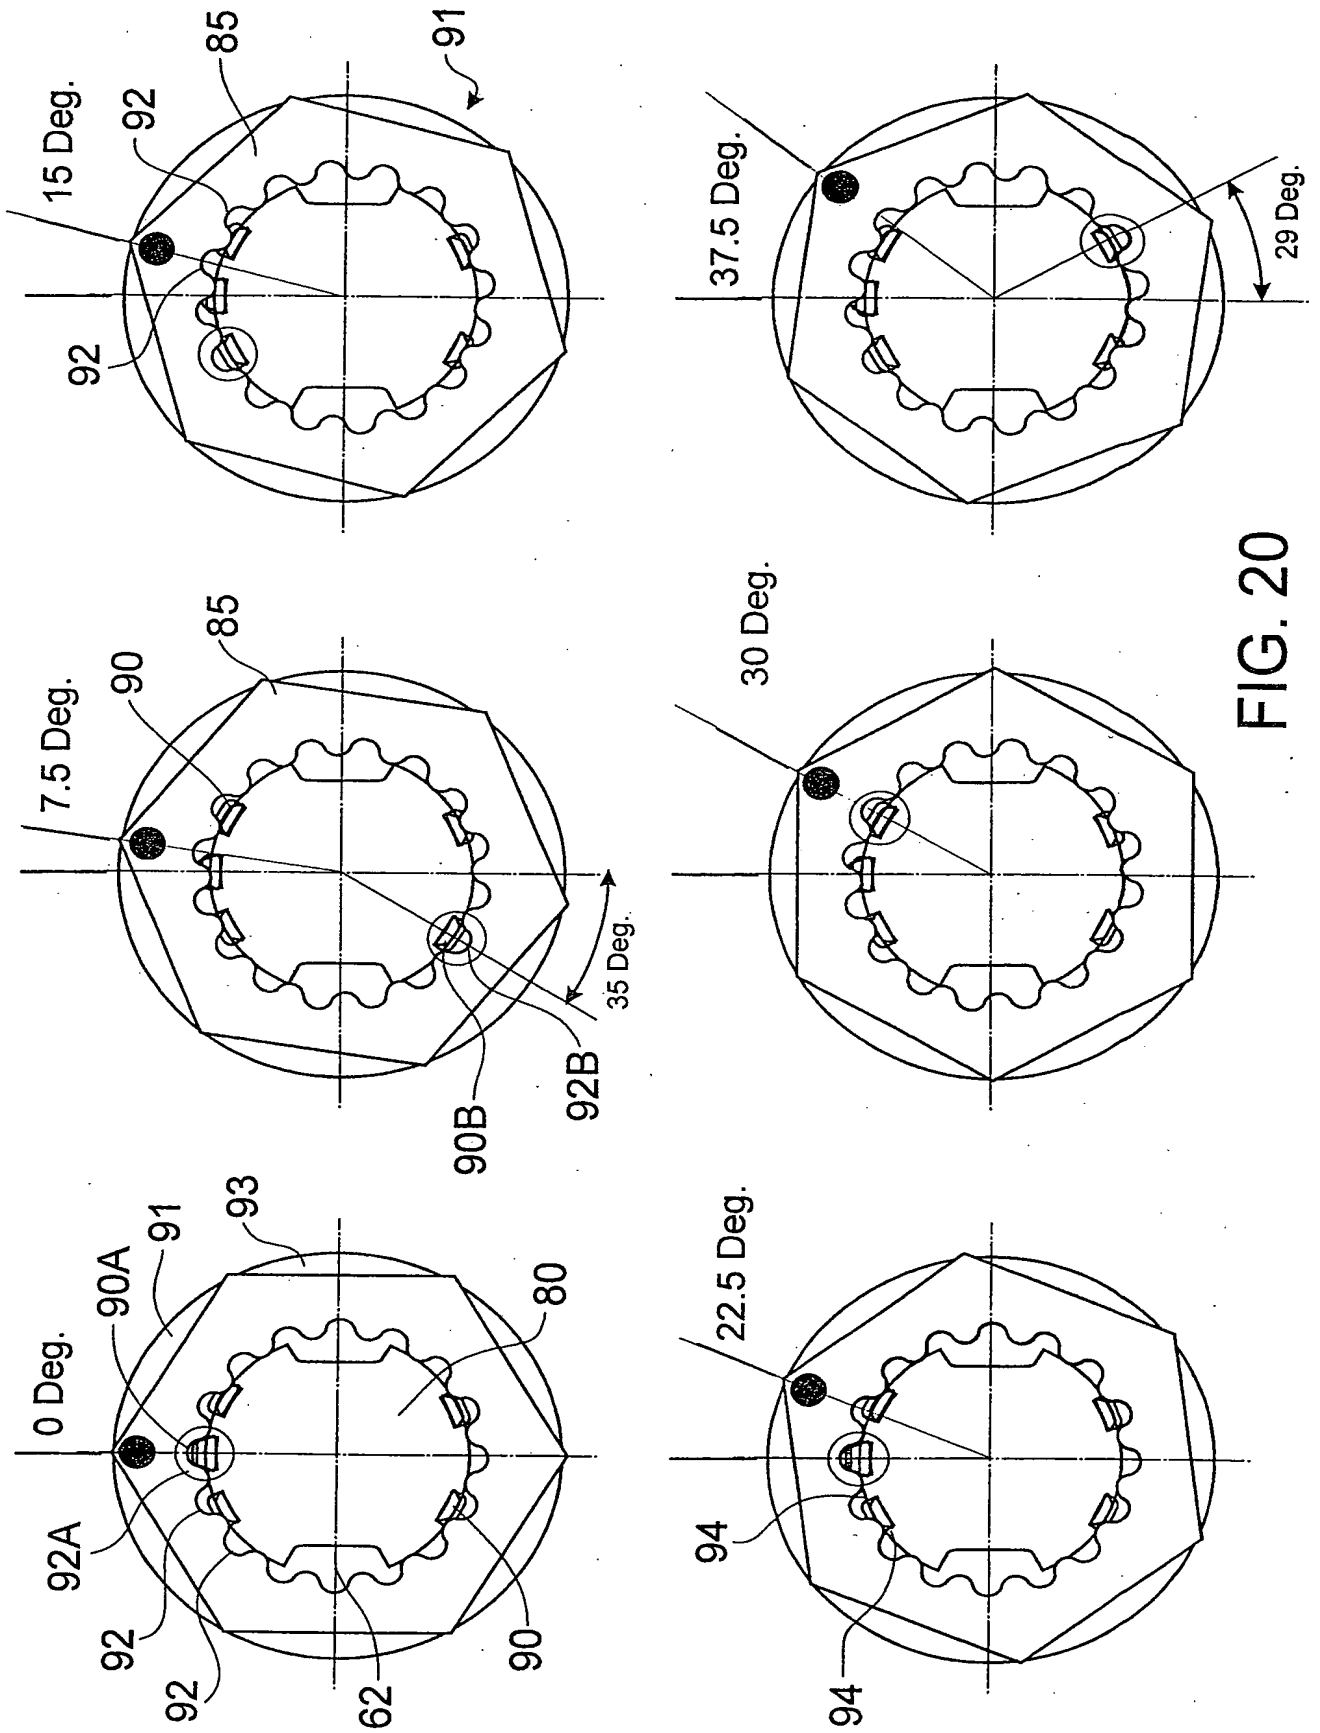


FIG. 20



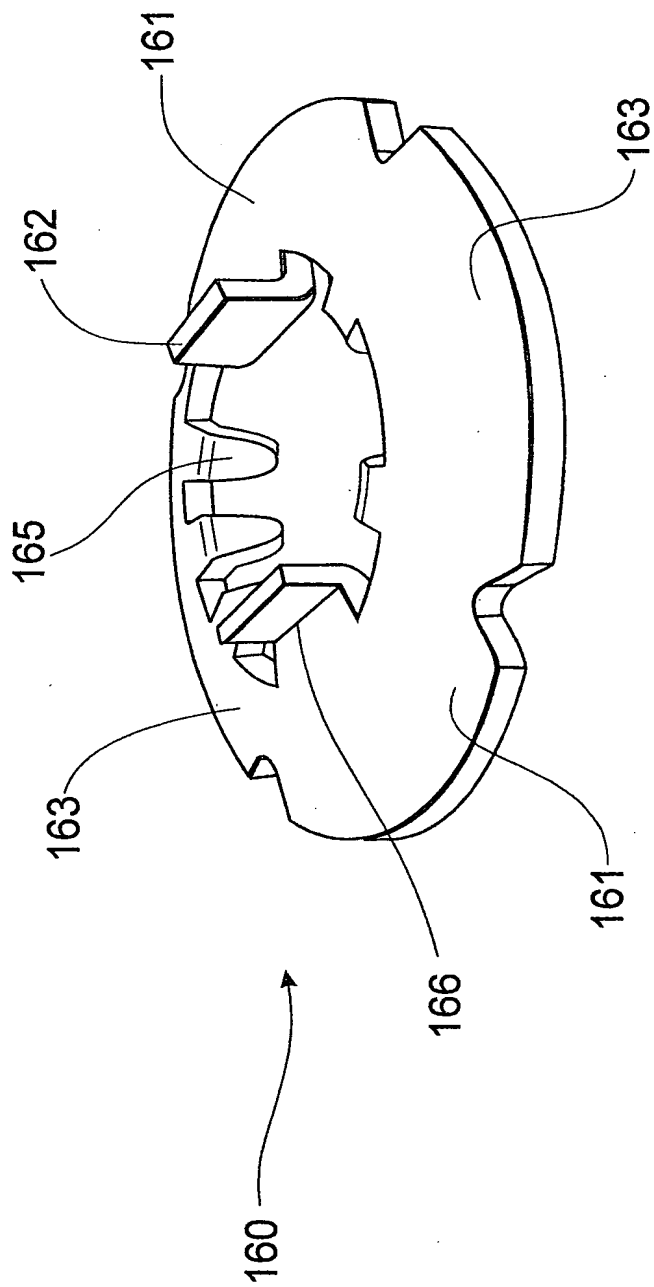


FIG. 21